

PROJECT:

SCHEDULE:

DATE:

PREPARE BY:

NOTES:

DESCRIPTION

Slim and elegant design ensures a discreet integration without compromising on performance. Suited to various applications such as building exteriors, outdoor corridors, garages, paths and other outdoor environments, wall pack not only provides energy efficient lighting, it delivers a bright white light to ensure perfect visibility and comfort at all times.

APPLICATIONS

Courtyard, Building exteriors




**Rated Life: Hours upto 236000hrs-L70
Warranty: 5 Years**

FEATURES

- Contemporary, architectural design and elegant appearance.
- Wall mounting, easy installation with removable back plate.
- IP66, IK10, 4KV.
- TYPE IV provides an excellent effect, managing glare while provides high level of visibility.
- 15W, 25W, 35W, 45W, 55W are available.
- Efficiency up to 140lm/W.
- Photocell is optional.

NEW FEATURES

- The power could be set to 30%, 50%, 75% and 100%.
- The CCT could be set to Cool White, Natural White and Warm White.
- Please select a suitable Power and CCT by the switch.

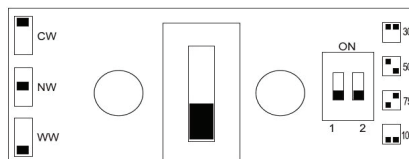

**Please consult us for details.*

ELECTRICAL INFORMATION

MODEL NO	CEWP006-015W	CEWP006-025W	CEWP006-035W	CEWP006-045W	CEWP006-055W
Power Consumption	15W(±10%)	25W(±10%)	35W(±10%)	45W(±5%)	55W(±5%)
Power Supply	Weled Power				
Input Voltage	120-277 VAC , 50 / 60 Hz				
Power Factor	>0.92				
Surge Protection	L-N 2KV, L&N-PE 4KV				
Driver Type	Constant Current (CC)				
Control	Photocell Control, Dimmable and Non-dimmable				

OPTIC INFORMATION

LED type	LED 2835				
Luminous Flux ($\pm 10\%$)	2100lm	3500lm	4900lm	6300lm	7700lm
Efficacy (5000K Ra70)	140lm/W				
Color Temperature	4000K (3000K, 5000K optional)				
Color Rendering Index	Ra80 (Ra70 optional)				
Beam Angle	U00C04				
UGR level	NA				

DIMENSIONS AND MOUNT


Product Dimension	293x289x97mm (11.53"x11.38"x3.81")
Luminaire Net	2.3 \pm 0.3kg (5.06 \pm 0.44Lbs)
Export Carton Size mm(inch)	360x360x150mm (14.17"x14.17"x5.9")
Gross Weight (± 0.3 kg/0.66Lbs)	2.7 \pm 0.3kg (5.94" \pm 0.44Lbs)
Mounting Option	Wall Mounting
Material	Aluminum Alloy
	Polycarbonate optical lens
Finish	Powder Coating
Fixture Color	Black (RAL9005)
EPA	NA
IK Rating	IK10
IP Rating	IP66
Category of corrosion	C3

LIFESPAN AND WARRANTY

Operating Temperature	30°C to + 50°C (-22°F to 122°F)
Life Time of LED @Ta=25°C	67,00hrs-L90
	146,000hrs-L8
	236,000hrs-L70
Warranty	5 Years


PHOTOMETRY

15-55W beam angle



U00C04


MOUNTING OPTIONS

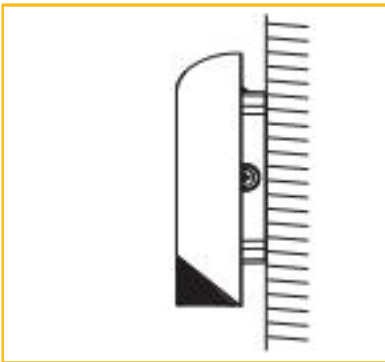

Wall mounting

DIMENSIONS

UNIT: mm

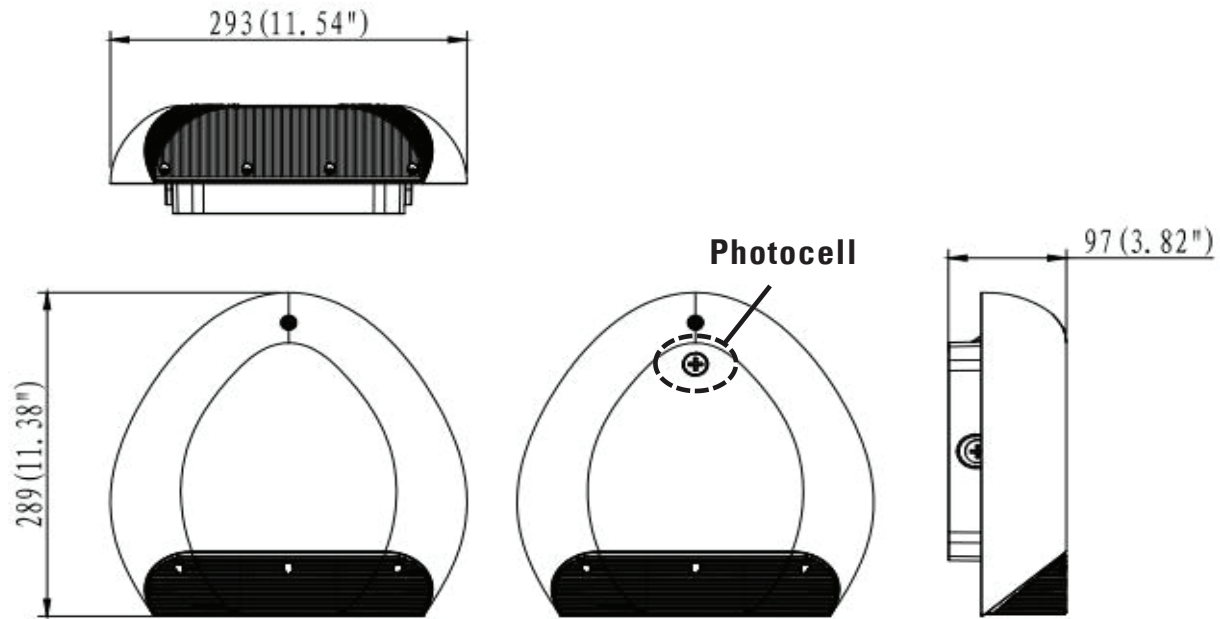

ACCESSORIES



Photocell Control
ANSI C136.41-2013
Dimming Receptacles
WP-KIT-0D



Integrated emergency back up
Emergency Power: 2W
Discharge Time: 3H
Working temperature:
0°C to 40°C (-22°F to +122°F)
Li-ion battery: 3000mAh
Model: BLD-FM04E-600400