

**PROJECT:**

**SCHEDULE:**

**DATE:**

**PREPARE BY:**

**NOTES:**

### DESCRIPTION

CELS SITE, LED Slim Wall Pack is low profile, light weight and designed for long life usage with no maintenance and great performance. This light is designed to quickly and easily upgrade traditional Slim Wall Pack light fixtures.



**Rated Life: Hours upto  
157,000hrs  
Warranty: 5 Years**

### APPLICATIONS

Pathways, Perimeter lighting, Building facades

\* Lumen output and light distribution are only for reference.

### FEATURES

- Gray cast-aluminum fixture is durable
- High Lumen output
- Special-designed PC optics lens (TYPE III Distribution)

### NEW FEATURES

- Emergency back-up
- Step dimming sensor

*\*Please consult us for details.*

### ELECTRICAL INFORMATION

MODEL NO	CEWP05-030	CEWP05-040	CEWP05-070
Power Consumption ( ±5%)	30W	40W	70W
Power Supply	SOSEN		
Input Voltage	120-277 VAC		
Power Factor	>0.95		
Surge Protection	6kV line-line, 10kV line-earth		
Driver Type	Constant Current (CC)		
Control	Dimmable		
	Photocell		

## OPTIC INFORMATION

LED type	LED 3030		
Luminous Flux ( $\pm 10\%$ )	4200LM	5600LM	9800LM
Efficacy (5000K Ra70)	140lm/W - 160lm/W optional		
Color Temperature	4000K, 5000K		
Color Rendering Index	Ra70		
Beam Angle	U04201	R08401	
UGR level	NA		

## DIMENSIONS AND MOUNT

Product Dimension	196x96x186mm(7.72x3.78x7.32")	282x125x205m(11.10x4.92x8.07")
Luminaire Net	1.42 $\pm$ 0.2kg(3.13 $\pm$ 0.44Lbs)	2.76 $\pm$ 0.2kg(6.09 $\pm$ 0.44Lbs)
Export Carton Size mm(inch) 30W	515x405x240mm (20.28x15.94x9.45")(6pcs/ctn)	
Export Carton Size mm(inch) 40W/70W	330x155x235mm (12.99x6.10x9.25")(1pcs/ctn)	
Gross Weight ( $\pm 0.3$ kg/0.66Lbs)	12.17 $\pm$ 0.3kg (26.83 $\pm$ 0.66Lbs)(6pcs/ctn)	3.35 $\pm$ 0.3kg (7.39 $\pm$ 0.66Lbs)(1pcs/ctn)
Mounting Option	Wall Mounting	
Material	Aluminum Alloy	
	Polycarbonate optical lens	
Finish	Powder Coating	
Fixture Color	Bronzer, Black, Grey	
EPA	NA	
IK Rating	IK08	
IP Rating	IP66	
Category of corrosion	C3	

## LIFESPAN AND WARRANTY

**Operating Temperature** -30°C to + 45°C (-22°F to 113°F)

**Life Time of LED  
@Ta=25°C**

42000hrs-L90


96000hrs-L80

157000hrs-L70


**Warranty**

5 Years

## PHOTOMETRY

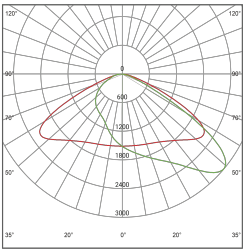


**U04201  
30W**

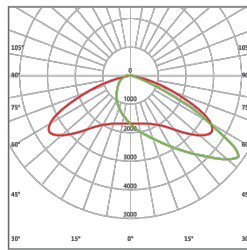


**R08401  
40W, 70W**

## MOUNTING OPTIONS

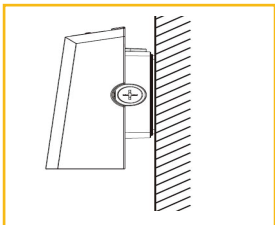


**Wall mounting**

## DIMENSIONS

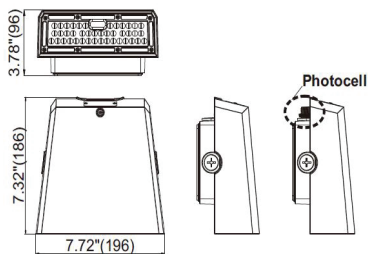

30W

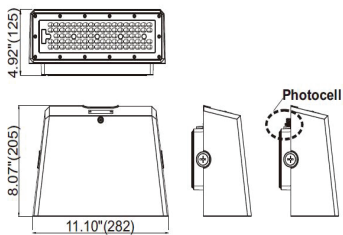

40/70W

## ACCESSORIES



**Photocell**  
JL-403C  
120-277Vac input, IP65 rating